


279.00 EUR  
incl. 19% VAT, plus [shipping](#)

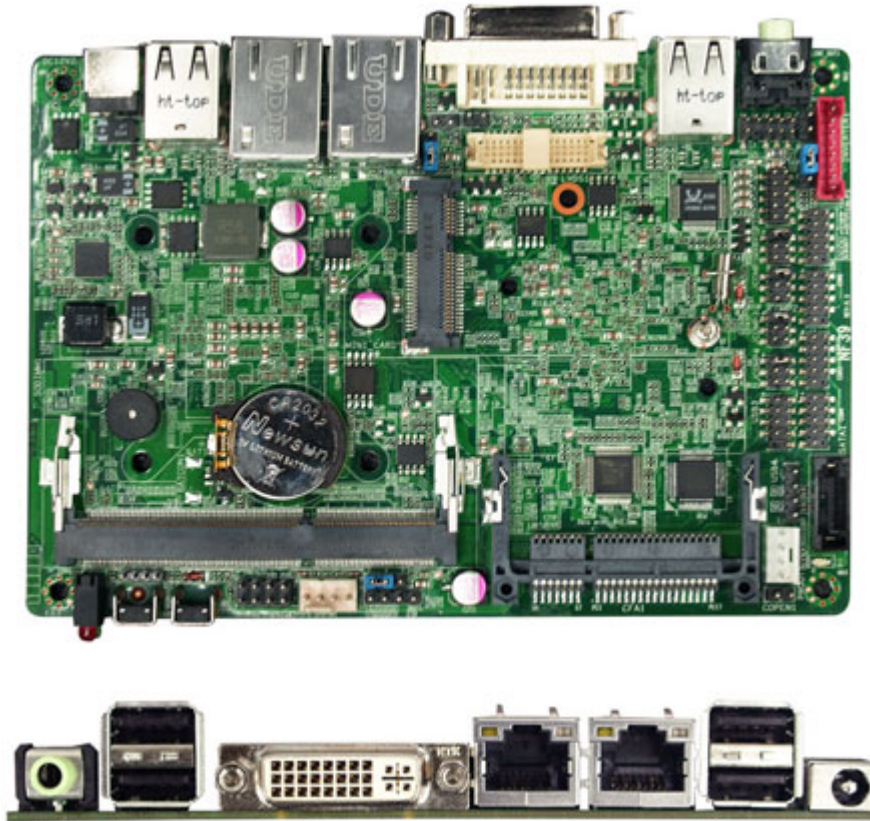

- INTEL® Celeron-M Processor 1047UE + HM65 Chipset
- Support 1 \* DDR3 1066/1333MHz Single CH up to 8GB
- Support 1 \* Serial ATAIII (6Gb/s) Devices
- Support CFast card
- Support mSATA card (Share with Mini PCI-E)
- Support Mini PCI-E x 1
- Integrated Realtek ALC662 HD Audio CODEC with 2CH
- 1 \* 24 bits Dual Channel LVDS header
- Support DVI-I Output
- Supports 2 \* Realtek RTL8111F-CG Gigabit LAN
- Support CPU Smart FAN
- Support RS232/422/485 on COM1
- 148 x 102mm 3.5" SBC Form Factor

|                        |                                                                                                 |
|------------------------|-------------------------------------------------------------------------------------------------|
| <b>CPU</b>             | INTEL® Celeron-M Processor 1047UE (1.4GHz)                                                      |
| <b>Chipset</b>         | INTEL®HM65 Express chipset                                                                      |
| <b>Memory</b>          | 1 * DDR3 1066/1333MHz Single CH SO-DIMM up to 8GB                                               |
| <b>Expansion Slots</b> | 1 * MINI PCI-E                                                                                  |
| <b>Storage</b>         | 1 * Serial ATAIII 6Gb/s connector<br>1 * CFast card socket<br>1 * mSATA (Share with Mini PCI-E) |
| <b>Audio</b>           | Realtek ALC662 HD Audio CODEC with 2-Channel                                                    |
| <b>Ethernet LAN</b>    | 2 * RTL8111F-CG Gigabit LAN                                                                     |
| <b>USB</b>             | Embedded 7 * USB 2.0/1.1                                                                        |
| <b>LVDS</b>            | Onboard 1 * 24-bits Dual channel LVDS connectors                                                |

|                         |                                                                                                                                                                                                                                                          |
|-------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Rear Panel I / O</b> | 4 * USB 2.0/1.1 ports<br>2 * RJ-45 ports<br>Line-out port<br>1 * DVI-I port<br>1 * 12V DC-IN JACK                                                                                                                                                        |
| <b>Internal I / O</b>   | 2 * USB 2.0 header for 3 * USB 2.0 ports<br>1 * Audio header<br>System/Chassis/NB Fan Connectors<br>1 * GPIO header<br>1 * CFast card reader socket<br>DIY switch x2 (reset & power button)<br>4 * COM header (COM2~4 for RS232, COM1 for RS232/422/485) |
| <b>BIOS</b>             | AMI 32MB SMT Flash ROM                                                                                                                                                                                                                                   |
| <b>Form Factor</b>      | 3.5" SBC form factor (148mmx102mm)                                                                                                                                                                                                                       |
| <b>Certificate</b>      | CE,FCC,RoHS,ERP                                                                                                                                                                                                                                          |
| <b>Functional</b>       | ATM, Automation, Medical Equipment, Security, General Application, Transportation, Digital Signage, Kiosk, POS machine, LCD TV PC, Embedded Fanless application                                                                                          |
| <b>Temperature</b>      | Operating within 0~60 centigrade<br>Storage within -20-85 centigrade                                                                                                                                                                                     |