
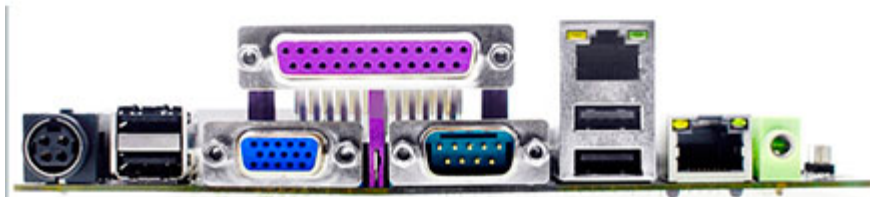


229.00 EUR  
incl. 19% VAT, plus [shipping](#)

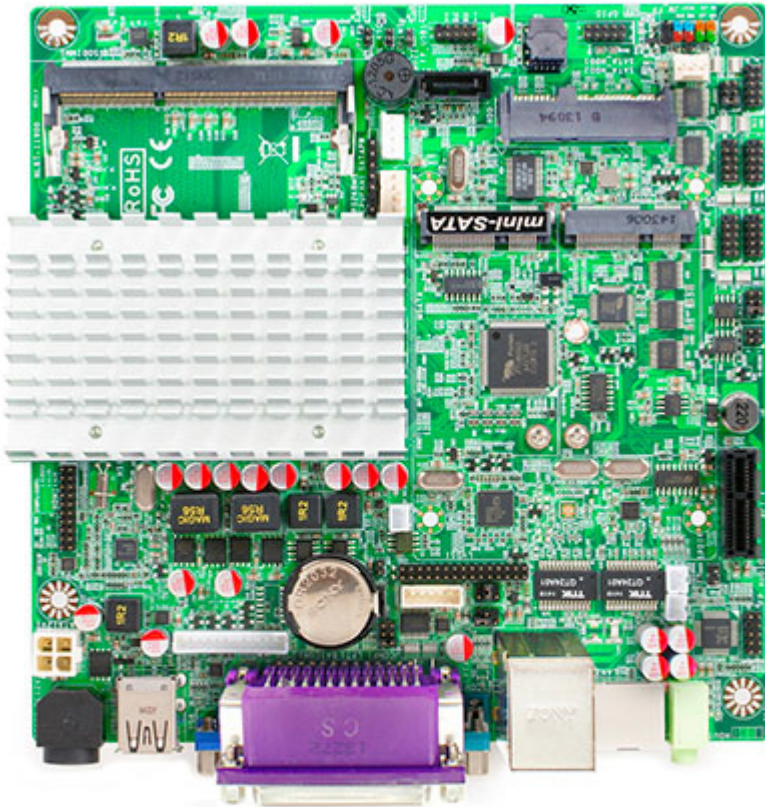

- INTEL Bay Trail I1900 / N2930 Quad Core processor
- Support DirectX 11 3D Graphics Acceleration
- Support DDR3L 1333
- Integrated HD Audio CODEC
- Support 1\*PCI Express Gigabit LAN
- Support 1\*USB3.0 port
- Onboard 1\*MiniPCI-E connector
- Onboard 1 \*M- SATA connector
- 2 Phase CPU Power Support
- Support Slim hard drive design
- Support Amplifier function(3W)
- Support Thunder Protection Function
- [Thin mini ITX](#) Form Factor(170mm X170mm)

<b>CPU-Chipset</b>	<ul style="list-style-type: none"> <li>• INTEL Bay Trail I1900 / N2930 Quad Core processor</li> <li>• INTEL® Bay Trail SOC chipset</li> <li>• 2 Phase CPU Power Support</li> </ul>
<b>I.O Chipset</b>	<ul style="list-style-type: none"> <li>• Fintek® F71869A</li> </ul>
<b>Memory</b>	<ul style="list-style-type: none"> <li>• 1* SO-DIMM slot</li> <li>• Support DDR3L 1333</li> <li>• Max. capacity of system memory up to 8GB</li> </ul>
<b>Expansion Slots</b>	<ul style="list-style-type: none"> <li>• 1* Mini PCI-E connector</li> <li>• 1* PClex1 slot</li> </ul>

<b>Storage</b>	<ul style="list-style-type: none"> <li>• 1* Serial ATA2 3Gb/s connector or 1*SATA +Power Connector(7+15Pin)</li> <li>• 1* <a href="#">M-SATA Connector</a></li> </ul>
<b>Audio</b>	<ul style="list-style-type: none"> <li>• AVLC887 Audio CODEC</li> <li>• HD Audio CODEC</li> </ul>
<b>Ethernet LAN</b>	<ul style="list-style-type: none"> <li>• Realtek® RTL8111G Chip</li> <li>• PCI Express Gigabit LAN</li> </ul>
<b>LVDS</b>	<ul style="list-style-type: none"> <li>• Onboard 24-bit Dual channel</li> </ul>
<b>USB</b>	<ul style="list-style-type: none"> <li>• 5* USB 2.0/1.1(3 distribute in back panel, 2 distribute in mid-board)</li> <li>• 1* USB3.0</li> </ul>
<b>Special Features</b>	<ul style="list-style-type: none"> <li>• Support CPU Smart Fan</li> <li>• Support Watch dog Technology</li> <li>• Support GPIO Technology</li> <li>• Support VGA header</li> <li>• Support Power On board</li> <li>• Support Amplifier function(3W)</li> <li>• <a href="#">Support Slim hard drive design</a></li> <li>• Support 1*RS422/RS485 COM header</li> <li>• Thunder Protection Function</li> <li>• All Solid Capacitor design</li> <li>• <a href="#">All Power Pack MOSFET design</a></li> </ul>
<b>Back Panel I / O</b>	<ul style="list-style-type: none"> <li>• 3* USB 2.0/1.1 ports</li> <li>• 1* USB3.0 port</li> <li>• 1* RJ-45 port</li> <li>• 1* Line-out port</li> <li>• 1* VGA port</li> <li>• 1* COM port</li> <li>• 1* 12V DC in</li> </ul>
<b>Internal I / O</b>	<ul style="list-style-type: none"> <li>• 1* USB 2.0/1.1 headers for 2 USB 2.0/1.1 ports</li> <li>• 2* CPU / Chassis Fan connectors</li> <li>• 5* COM headers(1*RS422/RS485)</li> <li>• 1* PS2/KB header</li> <li>• 1* 4-pin ATX 12V Power connector</li> <li>• 1* 4-pin SATA Power connector</li> <li>• 1* 12-pin VGA header</li> <li>• 1* 20-pin HDMI header</li> <li>• 1* 24-bit Dual Channel LVDS header</li> <li>• 1* GPIO header</li> <li>• 1* Mini PCI-e connector</li> <li>• 1* M-SATA Connector</li> <li>• 1* SATA +Power Connector(7+15Pin)(Option)</li> <li>• 1* Audio header</li> <li>• 1* Front panel header</li> <li>• 1* HDMI _SPDIF header</li> </ul>
<b>BIOS</b>	<ul style="list-style-type: none"> <li>• AMI 64MB DIP Flash ROM</li> </ul>
<b>Form Factor</b>	<ul style="list-style-type: none"> <li>• Thin mini ITX Form Factor(170mm X 170mm)</li> </ul>