


999.00 EUR

incl. 19% VAT, plus [shipping](#)

- VGA Input
- PAL/NTSC Input
- Touchscreen
- DIN-SLOT TFT !

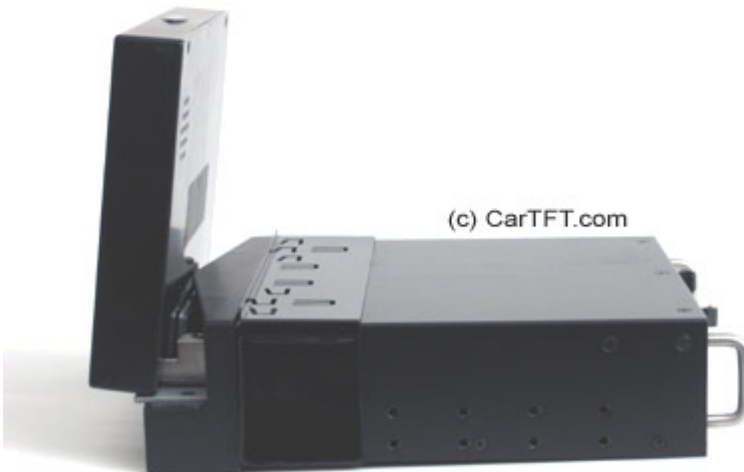

#### Features

- For In-Car Computing, PC, Server, GPS, and various VGA Use
- 1-DIN In-Dash, heavy duty construction
- Spring loaded, automated mechanical flip-out design (Non-Motorized)
- Left and Right swivel
- 4-wire resistive Touch Screen (USB)
- Multi-Monitor Touchscreen Support
- VGA Input x 1 & Video Input x 2
- NTSC / PAL Multi-System
- 16x9 Aspect Ratio
- High Resolution Display - up to 1600 x 1200
- Auto detects 800x480 resolution
- Upgraded High-Brightness CCFL

- Adjustable backlight level for night-time use
- Pixelworks High Performance Video and VGA Processor
- High Quality Scaling & Anti-Aliasing v - Auto power-on upon signal detection
- Automatic display adjustment
- On Screen Display Control
- 20-Pin heavy-duty connector
- Anti Glare Coating
- Supports 11V DC ~ 24V DC
- "E" Mark Certified for Automotive use
- Screen Size: Diagonal 7" (16:9)
- Physical Resolution: 800 (H) x 480 (V) WVGA
- Supported Resolution: 640 x 480 ~ 1600 x 1200
- Dot Resolution: 2400 x 480 = 1,152,000 (dots)
- LCD Brightness (w/o Touchscreen)\*: 400 cd/m<sup>2</sup>
- Display Brightness (w/ Touchscreen): 300 cd/m<sup>2</sup>
- Touch Screen Interface: USB port
- Operating Voltage Range: DC 11V ~ 24V, 1A
- Power Supply: DC 12V
- Power Consumption: <8W
- Operating Temperature: 23°F ~ 158°F
- Dimension: Standard 1-DIN
- Weight (lb): 1.28
- FCC, CE, E13 Certification

#### **Dimensions**

- Base unit : 210mm length x 181mm width x 57 mm height
- Base unit (installed part in DIN-slot) :
  - 166 mm length x 180 mm width x 50mm height
- Display unit : 179 mm width x 127 mm height x 29 mm depth

Driver-CD included, compatible with :

- Windows 95/98/ME/NT4/2000/XP/7/8/8.1/10
- XP Tablet PC Edition
- Windows CE 2.12, 3.0, .net
- Linux RedHat,Mandrake,..
- Macintosh OS 9.x, 10.x
- DOS,..