

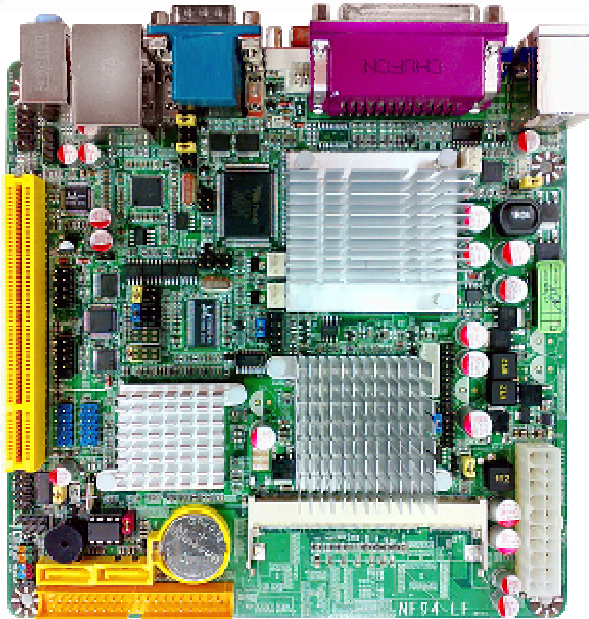


Mainboard Diagram

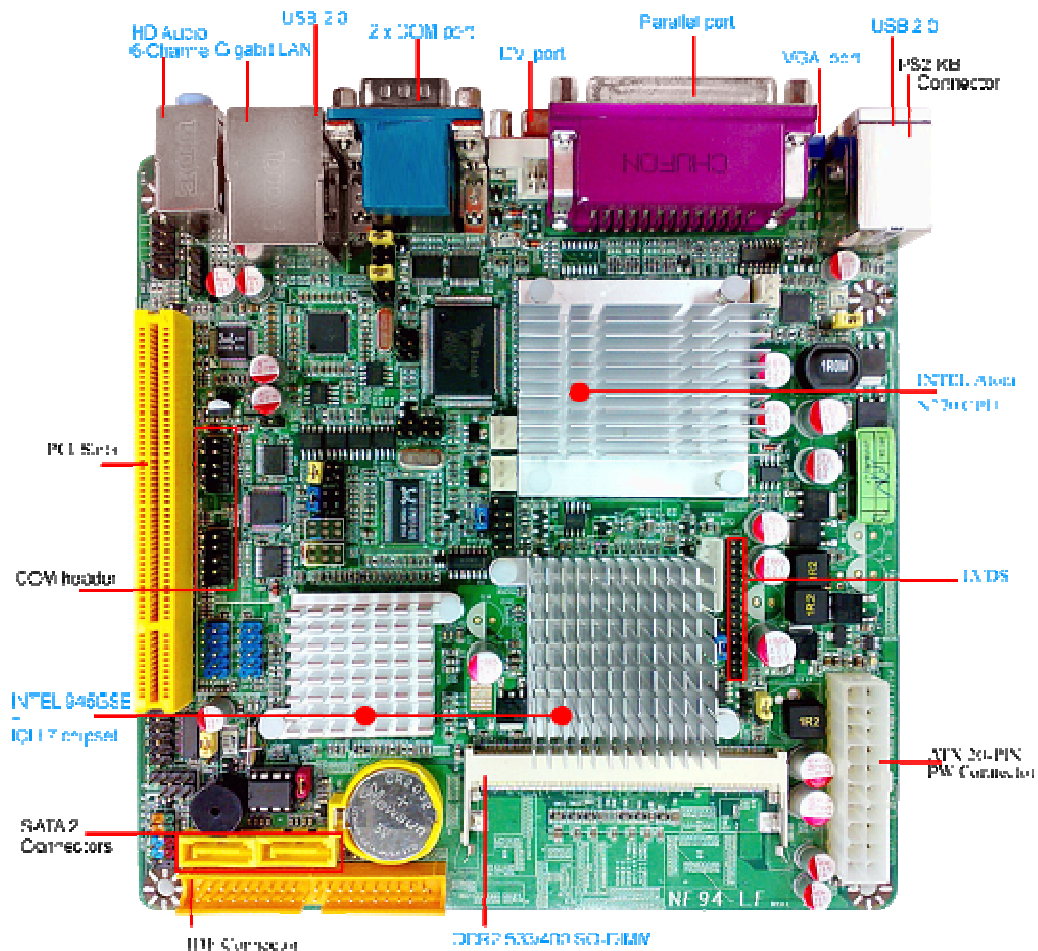

NF94-270-LF (Intel Diamond Ville)

1. INTEL[®] 945GSE + ICH7M Chipset
2. Support INTEL[®] Atom N270 CPU(45nm,512K Cache, 1.60 GHz, 533 MHz FSB)
3. Build-in INTEL[®] GMA 950 Graphics Core
4. Integrated LVDS support 18-bit TFT LCD
5. Supports 1x Gigabit LAN
6. Integrated ALC662 HD Audio CODEC with 6-CH
7. Support Watch dog Technology
8. Mini-ITX Form Factor(17cm x 17cm)



Board Specifications

■ CPU	■ INTEL [®] Atom N270 CPU(45nm,512K Cache, 1.60 GHz, 533 MHz FSB)
■ Chipset	■ INTEL [®] 945GSE + ICH7M chipset ■ Build-in INTEL [®] GMA 950 Graphics Core(Share Memory Size: 128/224MB) ■ Front Side Bus 533MHz
■ Memory	■ 1 * SO-DIMM Sockets for un-buffered Single Channel DDR2 533/400 SDRAM up to 2 GB
■ Expansion Slots	■ 1 * PCI slot
■ Storage	■ 2 * Serial ATA2 3Gb/s connectors ■ 1 * Ultra DMA 100 / 66 IDE connector
■ Audio	■ Realtek ALC662 6-Channel HD Audio CODEC
■ Ethernet LAN	■ Realtek RTL8111C PCI-E Gigabit Ethernet LAN
■ LVDS	■ Onboard 18-bit dual channel LVDS connector
■ USB	■ Embedded 8 * USB 2.0/1.1
■ Special Features	■ Intel Diamond Ville Platform ■ Support ACPI S3 ■ Support CPU Smart FAN ■ Support DC FAN
■ Rear Panel I / O	■ 4 * USB 2.0/1.1 ports ■ 1 * Keyboard connector ■ 1 * RJ-45 port ■ 3 * Audio I/O ports (Line-in, MIC and line-out) ■ 1 * VGA port ■ 2 * COM port for RS-232 ■ 1 * Parallel port ■ 1 * DVI-D port
■ Internal I / O	■ 2 * USB 2.0/1.1 headers for 4 USB 2.0 ports ■ NB / Chassis Fan connectors; ■ 1 * 20-pin ATX Power connector ■ 1 * 32-pin LVDS header & 1 * GPIO header & 1 * HDTV-OUT header ■ 2 * COM header (COM4 for RS-422/485) ■ 1 * AUDIO header
■ BIOS	■ Award 8MB SPI/DIP Flash ROM
■ Form Factor	■ Mini ITX Form Factor(170mm x 170mm)
■ Functional	■ ATM, Automation, medical Equipment, Security, Networking, POS, General Application, Gaming Machine, Transportation
■ Packing	■ Color Box Dimension : 200(W) x 200(D) x 70(H)mm ■ Cases Gross Weight : 15.4KGS ■ Cases Net Weight : 10.3KGS ■ 20 PCS / Cases, Case size : 720(L) x 410(W) x 200(H)mm
■ Certificate	■ CE, FCC, RoHS
■ Temperature	■ Operating within 0~60 centigrade ■ Storage within -20-85 centigrade

*For further information please visit the website at <http://www.jetway.com.tw>

*The Specification may be changed without further notice.



Product Accessories

G04-MJW121C-F	G03-NF94-LF	G02-CD28-F	G01-HD100-BK-F	G01-SATA-BK-F	F04-176-F
BOX 	Manual 	CD 	IDE Cable  x1	SATA Cable  x2	IO Shield 
G01-S+RGB-MB-F					
HDTV Cable 					